


mm 2.0

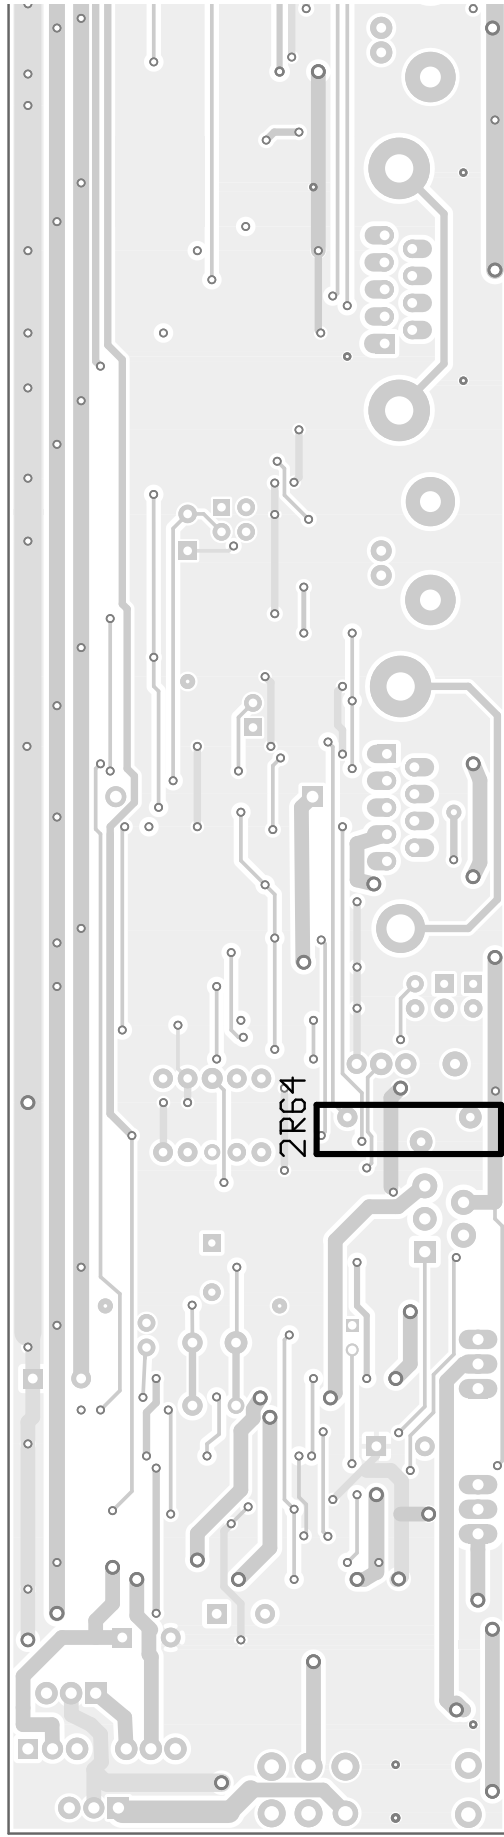

auxiliary
board
for
bellier

board
sub

board
gl

temperature

active
bellier
regulation


bellier
connector

temperature
deviation

LD connector
2ppD

connector
BNC

3422

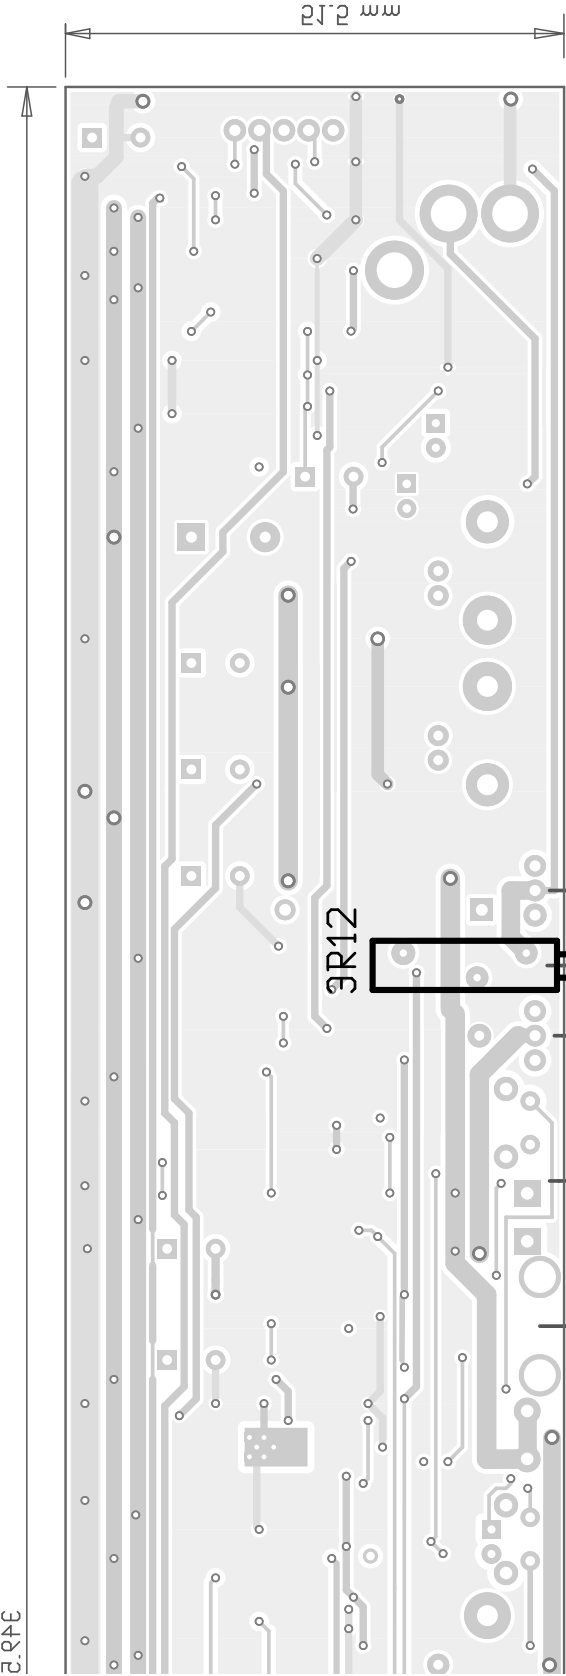

maximum
current


LD no 01

LD com1


LD current
not allowed

LD set
current

LD set
current

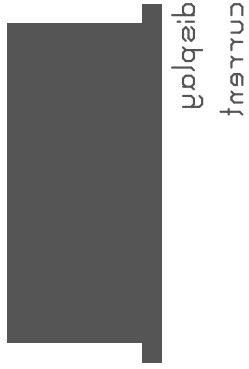

mm 2.0

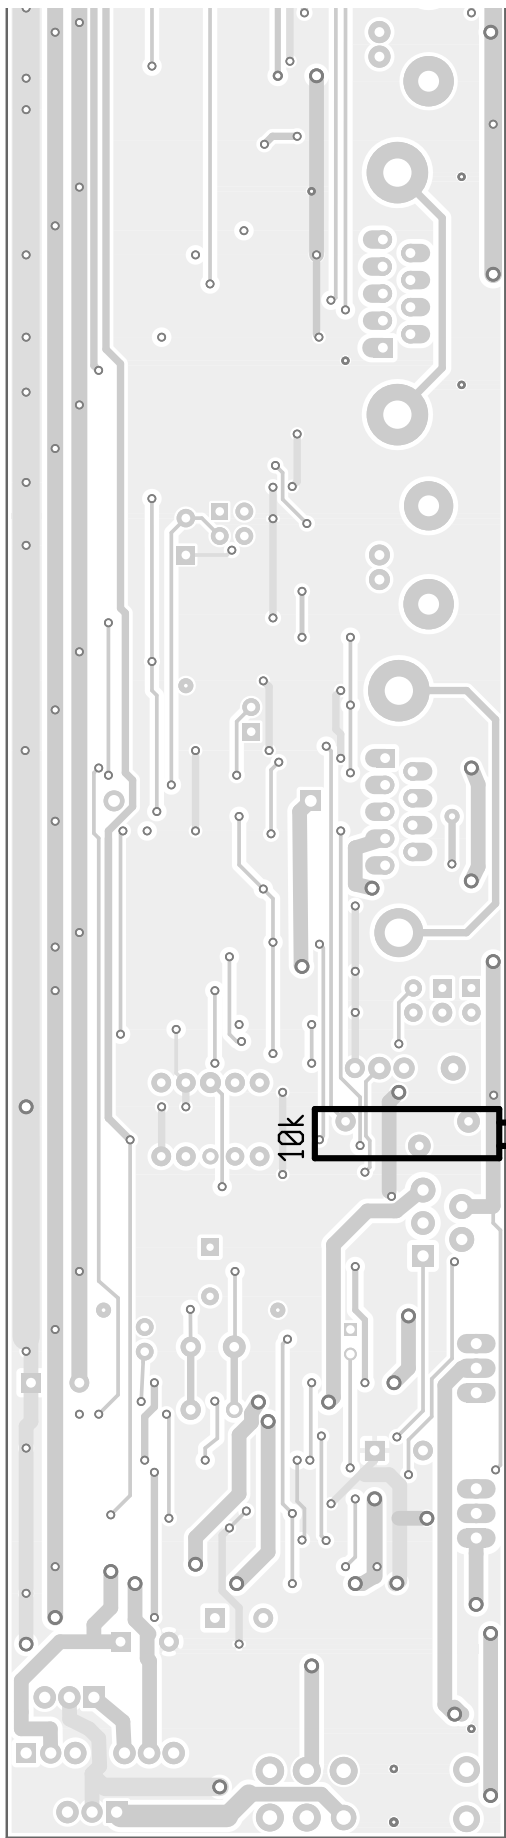

for better
batter backup
auxiliary

batter backup

batter
backup

temperature

active
battery regulation

batter
connector


temperature
deviation

LD connector SUPD

connector BNC



3422

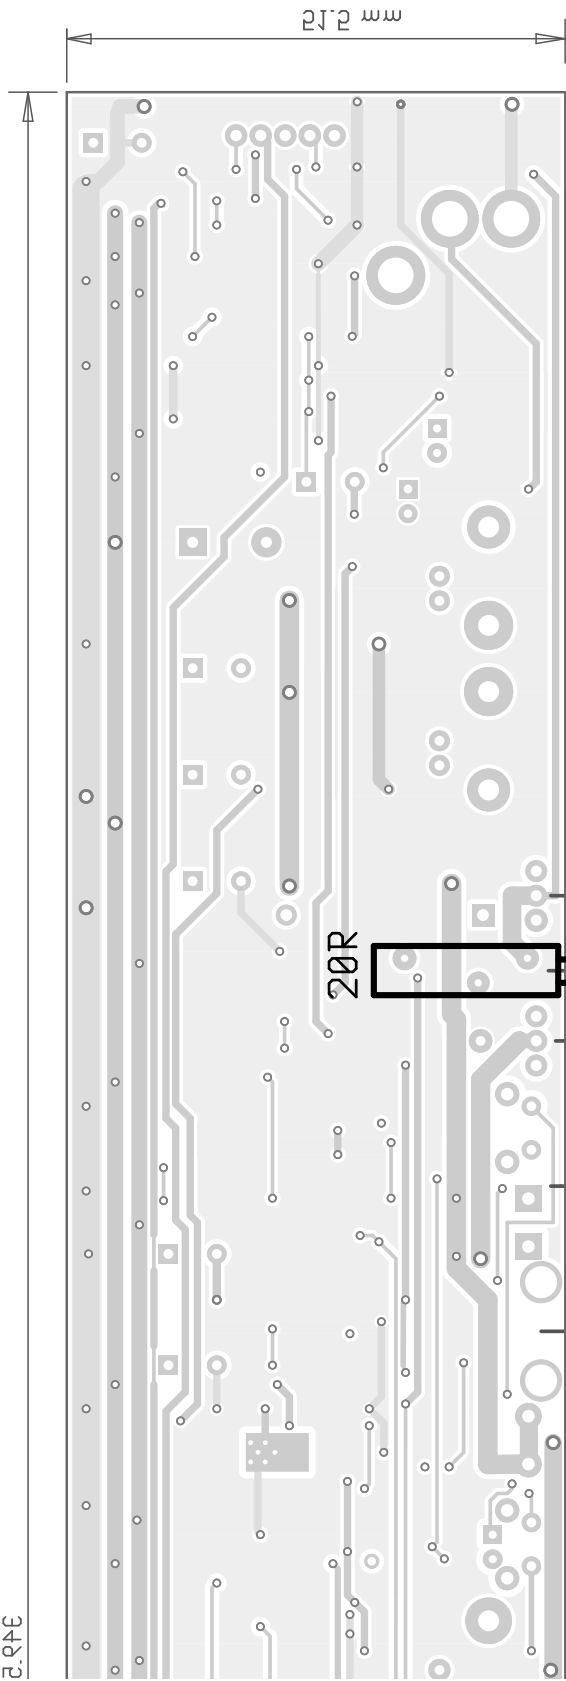

set maximum
current

LD no off

LD com

LD current
modulation

set LD
current

set LD
current

set
current

