Grid (1 , 1)

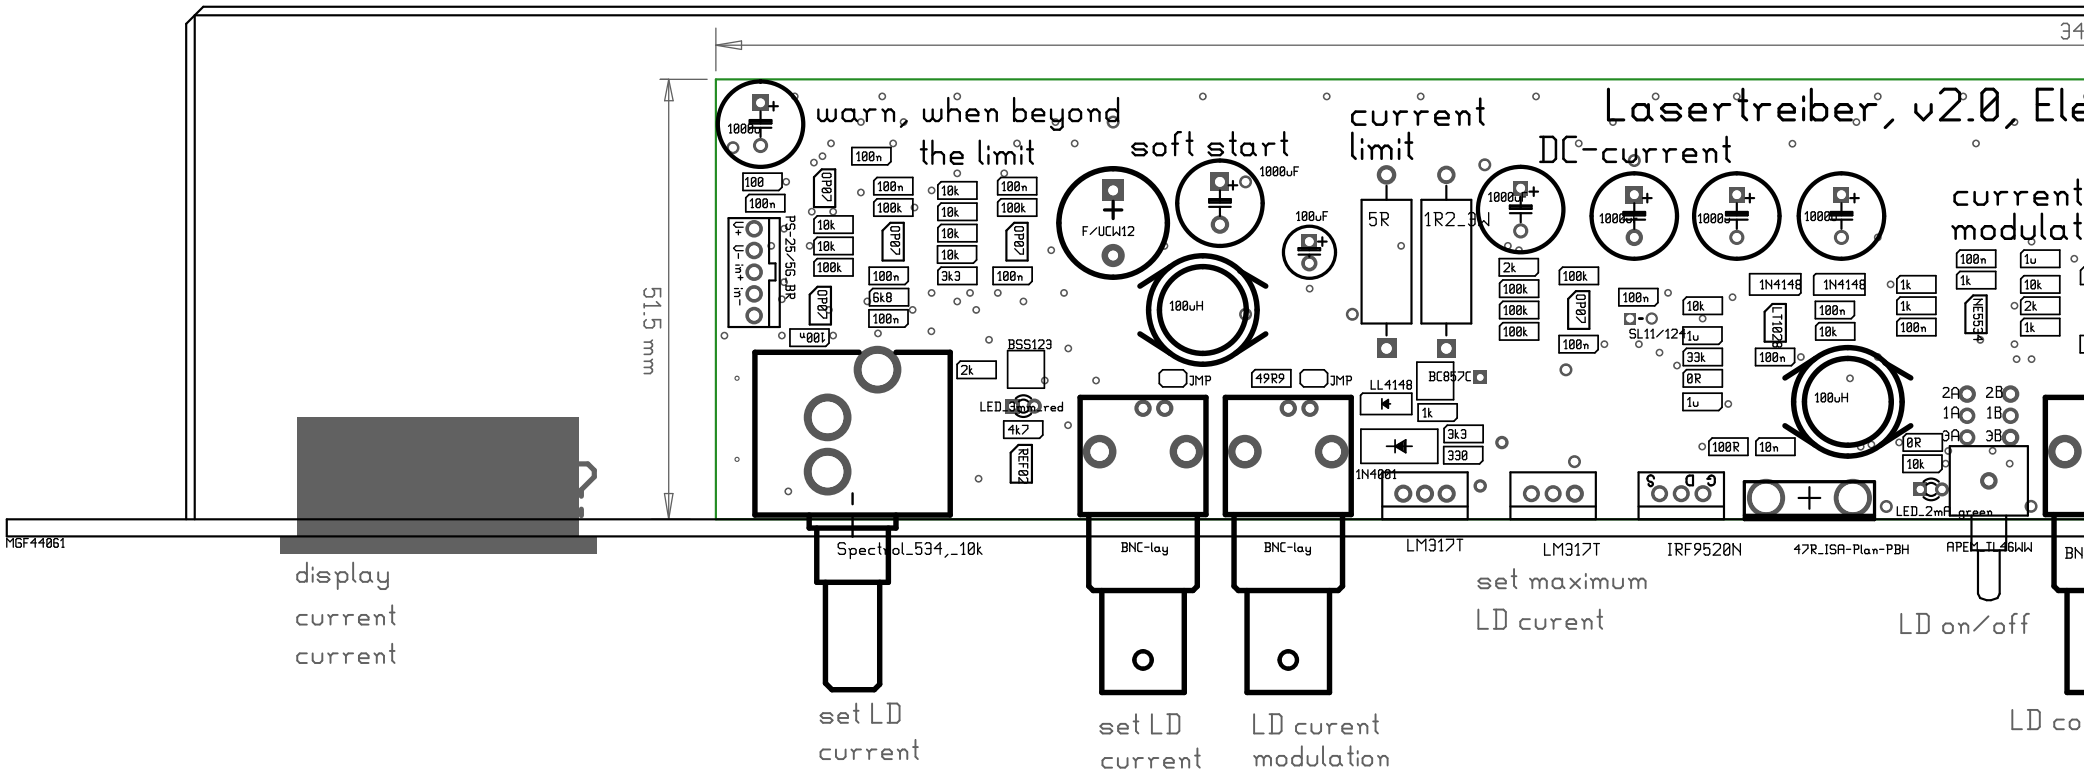
warn, when beyond
the limit
soft start
current
limit
DC-current
Lasertreiber, v2.0, Ele
current
modulat
51.5 mm
MGF44061
display
current
current
Spectrol_534,_10k
BNC-lay
BNC-lay
LM317T
LM317T
IRF9520N
47R_ISA-Plan-PBH
APEM_TL6GWW
set LD
current
set LD
current
LD curent
modulation
set maximum
LD curent
LD on/off

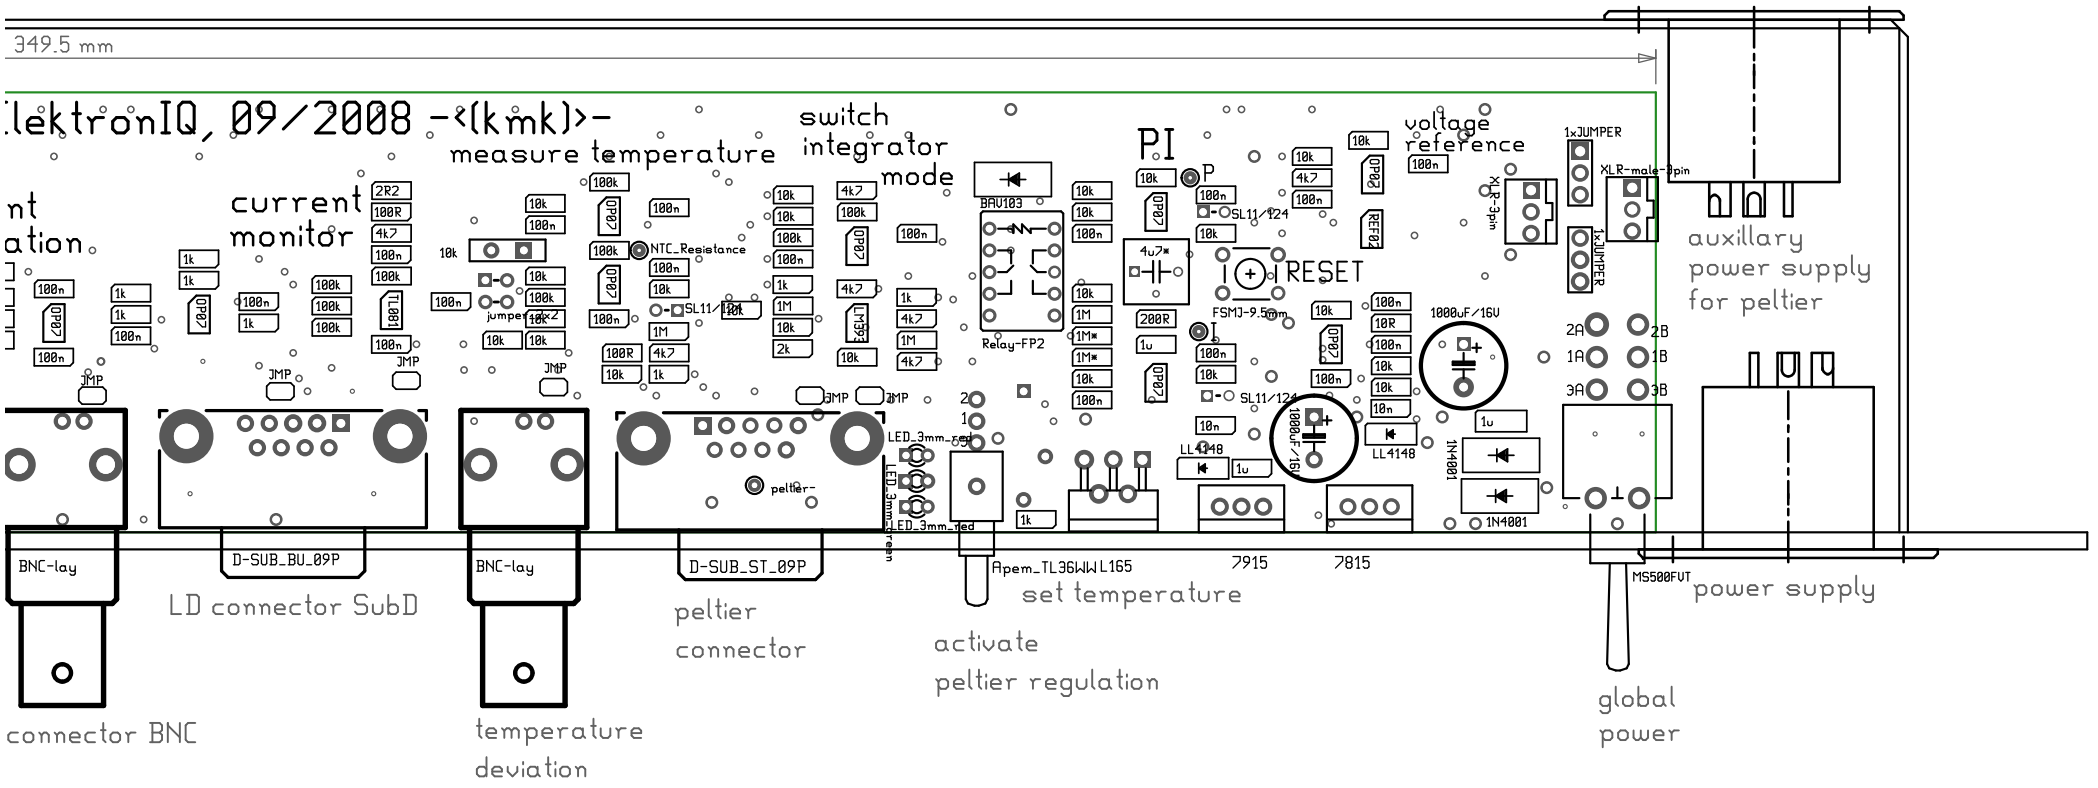
349.5 mm
lektronIQ, 09/2008 -<(kmk)>-
measure temperature
switch
integrator
mode
current
monitor
PI
P
I
RESET
voltage
reference
1xJUMPER
XLR-male-3pin
auxillary
power supply
for peltier
BNC-lay
D-SUB_BU_09P
BNC-lay
D-SUB_ST_09P
Apem_TL36WWL165
7915
7815
MS500FVT
LD connector SubD
peltier
connector
set temperature
activate
peltier regulation
power supply
global
power
connector BNC
temperature
deviation