


shutter

The value of R3 should be matched to the desired operating voltage. (12 V relays coil resistance is 1k, LED current should be 2 mA)

The value of R7 and C1 depend on the shutter. R7 limits the continuous current. C1 should be large enough to provide a current rush on switch.

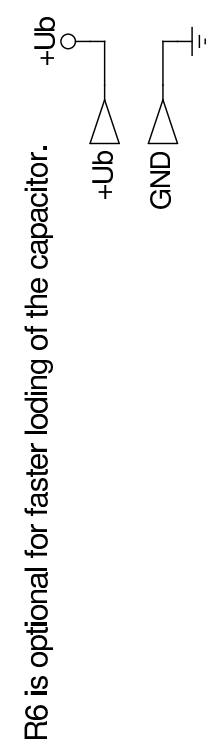

<h1 style="text-align: center;">Shutterdriver-Single</h1>		REV: 2.0
		DATE: 04.08.11
TITLE <h2 style="text-align: center;">shutterdriver-single.sch</h2>		DRAWN BY: --<(kmk)-->
		FILE: